

**LINEN MACHINERY
GENERAL CATALOGUE**



TOSTEN

Continuous batch washer

High quality proprietary technology: dilution effect realizes high cleaning capability and excellent water saving effect (patent number 2801460). The sanitation management mechanism is equipped: proprietary mechanism.



**Large type
continuous batch washer
GIII-L series**

capacity : 60kg / lot
driving voltage : 7.5kw / unit
number of modules : 4, 6, 7, 8, 9, 10, 11, 12, 13, 14,
15, 16 module
(Combination of 3 module and 4 module unit)



**Compact type
continuous batch washer
GIII-S**

capacity : 50kg / lot
driving voltage : 7.5kw / unit
number of modules : 4, 5, 6, 7, 8, 9, 10, 11, 12,
13, 14, 15, 16 module
(Combination of 3 module, 4 module and 5 module unit)



**Rotary screen
RS-500/1000S (Proprietary mechanism
is equipped)**

maximum work amount : 6/16 ton / h
driving voltage : 0.2/0.2 kw / h
Dimension : 500S / W1,045×D400×H1,000mm
1000S / W1,555×D400×H1,000mm

Automatic washer-extractor

Wide range of machinery, such as front & rear-inclined typed MOX-WTB.

※ MOX 60×100×200 also have hopper typed WU-H.



**Automatic washer-extractor
MOX-50**

JIMS capacity : 50kg / load
Power rating : 7.5kw
Dimension : W1,600×D1,650×H1,900mm




**Automatic washer-extractor
MOX-60/100WTB**

JIMS capacity : 60/100kg / load
Power rating : 11/15kw
Dimension : 60WTB / W1,870×D1,830×H1,900mm
100WTB / W2,090×D2,170×H2,000mm




**Automatic washer-extractor
MOX-100FU**

JIMS capacity : 100kg / load
Power rating : 15kw
Dimension : W2,080×D2,170×H2,100mm



**Automatic washer-extractor
MOX-200WTB**

JIMS capacity : 200kg / load
Power rating : 18.7kw
Dimension : W2,300×D2,550×H2,435mm



**Tosen-Milnor automatic
washer-extractor
MWX-450/600M**

JIMS capacity : 183/264 kg / load
Power rating : 11/11 kw
Dimension : 450M / W2,378×D2,212×H2,311mm
600M / W2,690×D2,133×H2,737mm



**Clean wall automatic
washer-extractor
SWX-60WU**

JIMS capacity : 60kg / load
Power rating : 11kw
Dimension : W1,600×D1,750×H1,900mm




**Clean wall automatic
washer-extractor
SWX-100WU**

JIMS capacity : 100kg / load
Power rating : 15kw
Dimension : W1,900×D2,173×H2,000mm




**Horizontal typed
automatic washer-extractor
F-1300**

JIMS capacity : 104kg / load
Power rating : 15kw
Dimension : W2,050×D1,750×H2,050mm




**Automatic washer-extractor
for futon cleaning
MOX-90F**

JIMS capacity : 86kg / load
Power rating : 7.5kw
Dimension : W2,196×D2,486×H2,446mm

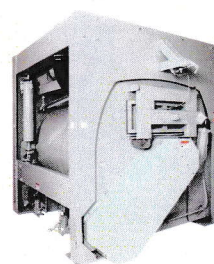

**Automatic washer-extractor
for mattress cleaning
MTE-6**

Capacity : 6 sheets / load
Power rating : 11kw
Dimension : W2,260×D3,147×H2,600mm

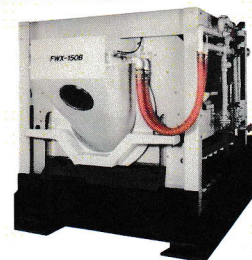

**Automatic washer-extractor
for rolled hand towel
(Oshibori) cleaning
FWX-150B**

JIMS Capacity : 150kg / load
Power rating : 7.5kw
Dimension : W2,400×D3,545×H2,370mm

Press & Extractor

There is a range from energy-saving hydraulic-presses to centrifugal extractors that are suitable for dehydration of the articles like uniform. TAP^{III} series is equipped with the sanitation management mechanism : proprietary mechanism that increase the quality and the energy saving effect.

Ultra hydraulic press

TAP^{III}-U

Capacity : 60kg / load
Maximum extracting pressure : 5.9MPa
Power rating : 22.75kw
Dimension : W2,130XD1,970XH3,950mm

Hyper hydraulic press

TAP^{III}-H

Capacity : 60kg / load
Maximum extracting pressure : 5.4MPa
Power rating : 19.25kw
Dimension : W2,160XD1,970XH3,955mm

Hydraulic press

TAP^{III}

Capacity : 60kg / load
Maximum extracting pressure : 4.1MPa
Power rating : 11.75kw
Dimension : W2,097XD2,119XH3,822mm



Centrifugal extractor

BRS-60

Capacity : 60kg / load
Maximum extracting power : 340G
Power rating : 13.2kw
Dimension : W2,267XD2,692XH2,433mm




Centrifugal extractor

PS-65/100TU

Capacity : 45~65/70~100kg / load
Maximum extracting power : 800G
Power rating : 37/75kw
Dimension : 65 / W2,500XD2,400XH2,690mm 100TU / W2,748XD2,400XH2,850mm

Dryer

Dryer machines of energy and space saving and high productivity.

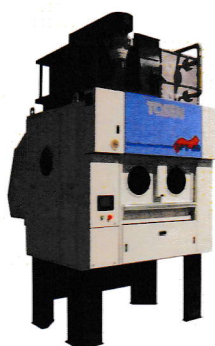

Dryer

SPT-60

JIMS capacity : 60kg / load
Power rating : 5.2kw
Dimension : W1,795XD2,270XH3,270(When using 770mm legs)mm



Dryer

SPT-120

JIMS capacity : 126kg / load
Power rating : 7.7kw
Dimension : W2,290XD2,655XH3,530(When using 570mm legs)mm



Dryer

SPT-120ECO

JIMS capacity : 126kg / load
Power rating : 7.7kw
Dimension : W2,560XD2,655XH3,755(When using 570mm legs)mm



Shaking tumbler

NTT^{III}


JIMS capacity : 60kg / load
Power rating : 5.9kw
Dimension : W2,365XD1,765XH3,805mm



Dryer

OT-60C


JIMS capacity : 60kg / load
Power rating : 5.2kw
Dimension : W1,520XD1,690XH2,325mm

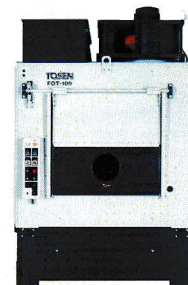

Dryer

FOT-100

JIMS capacity : 100kg / load
Power rating : 9.7kw
Dimension : W2,110XD1,830XH3,275mm

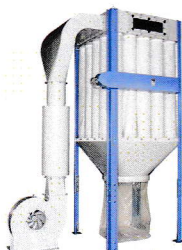

Lint collecting machine

TBF-5

Volume of airflow : 60~80m ³ / min
Power rating : 3.7kw
Dimension : W1,220XD1,900XH3,125mm



Heat recovery dryer

SPT-100W

JIMS capacity : 100kg / load
Power rating : 19.4kw
Dimension : W2,820XD3,354XH3,595mm

Roll ironer

Roll ironers of high quality finishing:
there are several alternatives according to the types and amount of the articles.



Hybrid tapeless roll ironer DAX-R

Main roll speed : 5~55m/min
Power rating : 2.25kw
Roll diameter / length : 1,010mm / 3,300mm
Number of rolls : 2rolls



Flat type calender roll ironer DAX series

Main roll speed : 5~60m/min
Power rating : 1.9kw
Roll diameter / length : 1,010mm / 3,300mm
Number of rolls : 2,3 rolls




Tapeless calender roll ironer NSY III series

Main roll speed : 5~60m/min
Power rating : 3kw
Roll diameter / length : 1,010mm / 3,300~3,500mm
Number of rolls : 2,3,4,5 rolls



Tapeless chest roll ironer SRL-33V

Main roll speed : 5~45m/min
Power rating : 29.5kw
Roll diameter / length : 850mm / 3,300~3,500mm
Number of rolls : 3 rolls

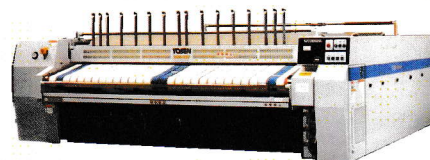


Chest roll ironer SGH series

Main roll speed : 5~60m/min
Power rating : 13.2kw (SGH-33V)
Roll diameter / length : 850mm / 3,050~3,300~3,500mm
Number of rolls : 2,3,4 rolls

Tunnel finisher

Soft and high quality finish without damaging original material and the color.
There are range of products according to the use and the amount of the articles.

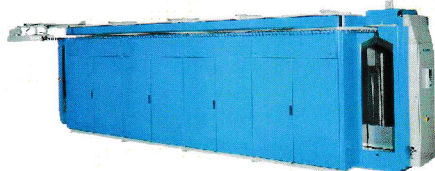


Steam tunnel SMT-4

Work speed : 1500pieces / h
Power rating : 37.5kw
Dimension : W8,164XD2,231XH2,815mm



Steam tunnel TUT-208

Work speed : 800pieces / h
Power rating : 15.9kw
Dimension : W4,970XD1,810XH2,670mm

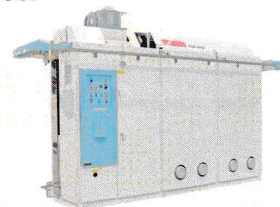

Steam tunnel TAF-600/800

Work speed : 600/800pieces / h
Power rating : 6.69/9.69kw
Dimension : 600 / W1,363XD3,332XH1,580mm
800 / W1,363XD4,647XH1,580mm

Dryer for personal belongings

High workability espacially for drying personal belongings.



Dryer with 3 divided tubs SOT-3 / 3G(Gas type)

Capacity : 9(3X3)kg / load
Power rating : 1.15kw
Dimension : W1,375XD1,100XH1,775mm



Vertical 2 door dryer PD-15/20W

JIMS capacity : (11X2)/(20X2) kg / load
Power rating : 0.6X2/1.2X2 kw
Dimension : 15W / W800XD1,191XH1,937mm
20W / W1,096XD1,445XH1,963mm

TOKEN

TOKYO SENSEN KIKAI SEISAKUSHO CO.,LTD

Head Office Phone # : 03-3780-8767
NO.6-2 OHASHI 1-CHOME.MEGURO-KU.TOKYO.JAPAN

Factory

707-1 GOYASIKI YAMANASHI-SHI.YAMANASHI-KEN.JAPAN

Branch Office

Sapporo/Sendai/Kanto-Daiichi/Kanto-Daini
Maebashi/Chiba/Kobe/Kanazawa/Shikoku

http://www.tosen.com/E-mail; sales@tosen.com

ISO9001:2000 certificate obtained: yamanashi factory



※ The specification and the appearance
of the machine may change due to
modification and/or improvement without notice.

Distributor